

XCubeNAS

XN7012R

QSAN



The Perfect NAS Solution for SMB Market

The Industry's first 2U NAS device(12+4+2) with Intel® Core™i3 dual-core processor, provides a versatile data processing center solution with a maximum sequential throughput 4,653MB/s and 4K sequential IOPS 356,443. With 2 PCIe expansion slots, XN7008R can easily connect to 10GbE network and 12Gb/s SAS expansion units, which deliver a large amount of storage capacity under ultra-high performance required infrastructure. XN7012R provides user the best choice of enterprise data storage and disaster recovery solution.

Product Features


- Innovative N+6 Hybrid Storage Capacity, support U.2 NVMe SSD.
- Unified Storage - Integrated storage system supports block and file storage simultaneously and following protocols, iSCSI, CIFS, NFS, FTP, WebDAV, and AFP.
- Comprehensive Data Security - Pool Military level encryption with AES-256, Write Once Read Many (WORM), Self-Encrypting Drive (SED).
- Rsync- Real-time Sync with Encryption.
- Advanced Enterprise Storage Technology - Auto-Tiering, Inline Compression, Deduplication.
- QSAN XCubeNAS is full VM supported : VMware, VEEAM, Citrix certification through virtualization certification standards and compatible with Microsoft Hyper-V environment.
- Video editing storage : High-speed 40GB Thunderbolt™3, supports cross platforms between Windows and Mac.
- High Expandability & Scalability : Support High speed 10GbE adaptor card, and SAS 12Gb expansion card.

Application areas

- IT Industry : File storage services, cloud storage services, near-line backup systems, secondary backup storage devices, disaster recovery solutions, virtualize host and storage devices.
- Government : Diskless workstation system, urban security monitoring system, agenda recording and playback system, digital file storage (digital collection), remote data backup center, cloud storage service, virtualized storage device.
- Education : Administrative system storage device, host and storage device virtualization, network storage service, security monitoring system, digital teaching system, library management system, computer classroom diskless workstation.
- Media Industry : Non-linear editing system, audio-visual editing system, online editing storage system, media database storage management, video on-demand system, content on-demand delivery system, wedding studio photo/video storage system.
- Finance & Insurance : Telemarketing recording system, policy image storage device, data storage system, Near-Line backup system, host virtualization application, development system storage device.
- Telecommunications industry : Online music play system, security monitoring system, customer service recording system, network storage service, Near-Line backup system, virtualization of host and storage devices.

Product Spec of XN7012R

Appearance

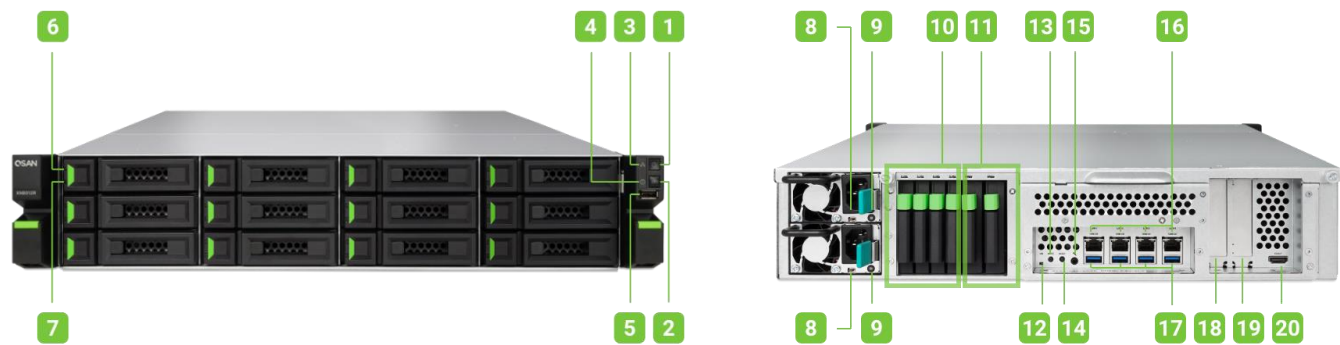

1. Power Button/LED Indicator for Power Status	2. Unique Identifier (UID) Button/LED Indicator	3. System Access LED Indicator	4. System Status LED Indicator
5. USB 2.0 Port	6. Disk Drive Power LED Indicator	7. Disk Drive Status LED Indicator	8. Power Supply Unit Power Port
9. Power Supply Unit PSU Indicator and Beep Off Button	10. SATA SSD Slot	11. NVMe SSD Slot	12. Unique Identifier (UID) LED Indicator
13. Mute Button	14. Reset Button	15. Console Port	16. Gigabit LAN Port
17. USB 3.0 Port	18. Additional PCIe Slot for Expansion (Gen3 x 8)	19. Additional PCIe Slot for Expansion (Gen3 x 4)	20. HDMI Port

Hardware Spec

Architecture	Single Controller
CPU	
Processor	Intel® Core™i3 64-bit Dual-Core 3.9GHz
Memory	
System Flash	8GB USB DOM
Memory Module Pre-installed	8GB DDR4 U-DIMM
Total Memory Slots	4
Memory Expandable up to	64 GB
Storage	
Drive Bays	3.5" Slot x 12, 2.5" Slot x 6
Maximum Drive Bays with Expansion Unit	426
Compatible Drive Type	3.5 " SATA HDD, 2.5" SATA HDD, 2.5" SATA SSD, 2.5" NVMe SSD
Drive Interface	SATA 6Gb/s (backward compatible with SATA 3Gb/s)
Maximum Internal Raw Capacity	393TB
Maximum Raw Capacity with Expansion Units	8,553TB
Hot Swappable Drive	yes
External Port	
USB 2.0 Port	1 (Front)
USB 3.0 Port	4 (Rear)
HDMI Port	1
Others	Console Port x1
LAN Port	
1GbE RJ45 LAN Port	4 (Onboard)
10GbE RJ45 LAN Port	2 (Option: THBE10R2)
10GbE SFP+ LAN Port	2 (Option: XN-E1002)
Thunderbolt 3	2 (Option: XN-TB302)
Expansion Port	
12Gb/s SAS Wide Port	2 (Option: XN-S1202)
PCIe Expansion	
Gen3x8 Slot	1
Gen2x4 Slot	1

Appearance	
Dimension (H x W x D) (mm)	88.5 x 438 x 510
Chassis Form Factor	19" Rackmount 2U 12+6 Bay
Net Weight (kg)	13.5
Gross Weight (kg)	14.9
Others	
System Fan	60mm x 60mm x 3 pcs, 40mm x 40mm x 1 pcs
Replaceable System Fan	yes
Power Recovery	yes
Scheduled Power On/Off	yes
Wake on LAN/WAN	yes
Power Supply Unit / Adapter	250W x2
Redundant Power Supply	Yes
AC Input Power Voltage	100V-240V
Power Frequency	50-60 Hz, Single Phase
Power Consumption	332 W (Access), 179 W (HDD Hibernation)
British Thermal Unit	1132 BTU/hr (Access), 611 BTU/hr (HDD Hibernation)
LCM Support	yes
Environment Temperature	
Operating Temperature	0 to 40°C
Storage Temperature	-10°C to 50°C
Operating Relative Humidity	20% to 80% non-condensing
Non-operating Relative Humidity	10% to 90%
Certification	
	CE / EAC / SASO / RCM / VCCI / BSMI / FCC
Warranty	
Standard Warranty	3 years