

# XCubeNAS

## XN8008RE

QSAN



## Ultra-high Performance and Virtualization Ready

With Intel® Xeon® E3 Quad-core processor provides native auto-tiering storage capability to fulfill the maximum performance and high-capacity demand for enterprises. Up to 64GB memory capacity, the XN8008RE's maximum sequential write performance is up to 4,690MB/s and 4K sequential IOPS is up to 346,000. This is the best choice for enterprise data storage applications, virtualization ready storage and data backup systems.

## Product Features


- With High performance and expansion by using 12Gb/s technology, maximum space up to 3.3PB.
- Unified Storage - Integrated storage system supports block and file storage simultaneously and following protocols, iSCSI, CIFS, NFS, FTP, and AFP.
- Universal and Efficient Data Backup - XMirror supports permission backup , disaster recovery and flexible protection between multiple NAS devices.
- KVM Built-in Hypervisor Manager : enabling user to create and manage virtual machines that run directly on the XCubeNAS and host multiple virtualized environments without the additional hardware investment.
- Comprehensive Data Security - Pool Military level encryption with AES-256, Write Once Read Many (WORM) , Self-Encrypting Drive (SED).
- Thin Provision - Precision Restore and dynamically Space.
- Advanced Enterprise Storage Technology - Auto-Tiering, Inline Compression, Deduplication and Thin Provision.

## Application areas

- IT Industry : File storage services, cloud storage services, near-line backup systems, secondary backup storage devices, disaster recovery solutions, virtualize host and storage devices.
- Government : Diskless workstation system, urban security monitoring system, agenda recording and playback system, digital file storage (digital collection), remote data backup center, cloud storage service, virtualized storage device.
- Education : Administrative system storage device, host and storage device virtualization, network storage service, security monitoring system, digital teaching system, library management system, computer classroom diskless workstation.
- Media Industry : Non-linear editing system, audio-visual editing system, online editing storage system, media database storage management, video on-demand system, content on-demand delivery system, wedding studio photo/video storage system.
- Finance & Insurance : Telemarketing recording system, policy image storage device, data storage system , Near-Line backup system, host virtualization application, development system storage device.
- Telecommunications industry : Online music play system, security monitoring system, customer service recording system, network storage service, Near-Line backup system, virtualization of host and storage devices.

# Product Spec of XN8008RE

## Apperance

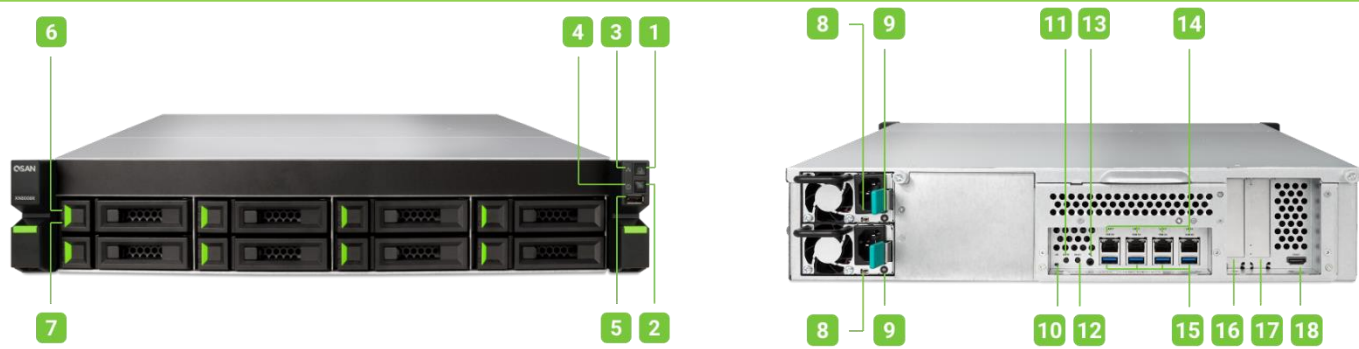

1. Power Button/LED Indicator for Power Status	2. Unique Identifier (UID) Button/LED Indicator	3. System Access LED Indicator	4. System Status LED Indicator
5. USB 2.0 Port	6. Disk Drive Power LED Indicator	7. Disk Drive Power LED Indicator	8. Power Supply Unit Power Port
9. Power Supply Unit PSU Indicator and Beep Off Button	10. SATA SSD Slot	11. NVMe SSD Slot	12. Unique Identifier (UID) LED Indicator
13. Mute Button	14. Reset Button	15. Console Port	16. Gigabit LAN Port
17. USB 3.0 Port	18. Additional PCIe Slot for Expansion (Gen3 x 8)	19. Additional PCIe Slot for Expansion (Gen3 x 4)	20. HDMI Port

## Hardware Spec

Architecture	All-in-one
CPU	
Processor	Intel® Xeon®64-bit Quad-Core 3.3GHz
Memory	
System Flash	8GB SATA DOM
Memory Module Pre-installed	8GB DDR4 U-DIMM
Total Memory Slots	4
Memory Expandable up to	64 GB
Storage	
Drive Bays	3.5" Slot x 8
Maximum Drive Bays with Expansion Unit	416
Compatible Drive Type	3.5 " SATA HDD, 2.5" SATA HDD, 2.5" SATA SSD
Drive Interface	SATA 6Gb/s (backward compatible with SATA 3Gb/s)
Maximum Internal Raw Capacity	160TB
Maximum Raw Capacity with Expansion Units	8,320TB
Hot Swappable Drive	yes
External Port	
USB 2.0 Port	1 (Front)
USB 3.0 Port	4 (Rear)
HDMI Port	1
Others	Console Port x1
LAN Port	
1GbE RJ45 LAN Port	4 (Onboard)
10GbE RJ45 LAN Port	2 (Option: THBE10R2)
10GbE SFP+ LAN Port	2 (Option: XN-E1002)
Thunderbolt 3	2 (Option: XN-TB302)
Expansion Port	
12Gb/s SAS Wide Port	2 (Option: XN-S1202)
PCIe Expansion	
Gen3x8 Slot	1
Gen2x4 Slot	1



Appearance	
Dimension (H x W x D) (mm)	88.5 x 438 x 510
Chassis Form Factor	19" Rackmount 2U 8 Bay
Net Weight (kg)	13.5
Gross Weight (kg)	14.9
Others	
System Fan	60mm x 60mm x 3 pcs
Replaceable System Fan	yes
Power Recovery	yes
Scheduled Power On/Off	yes
Wake on LAN/WAN	yes
Power Supply Unit / Adapter	250W x2
Redundant Power Supply	Yes
AC Input Power Voltage	100V-240V
Power Frequency	50-60 Hz, Single Phase
Power Consumption	263 W (Access), 122 W (HDD Hibernation)
British Thermal Unit	895 BTU/hr (Access), 417 BTU/hr (HDD Hibernation)
LCM Support	yes
Environment Temperature	
Operating Temperature	0 to 40°C
Storage Temperature	-10°C to 50°C
Operating Relative Humidity	20% to 80% non-condensing
Non-operating Relative Humidity	10% to 90%
Certification	
	CE / EAC / SASO / RCM / VCCI / BSMI / FCC
Warranty	
Standard Warranty	3 years